



COMPANY NAME: \_\_\_\_\_ JOB NAME/P.O.#: \_\_\_\_\_

A		B		A		B		A		B	
1				21				41			
2				22				42			
3				23				43			
4				24				44			
5				25				45			
6				26				46			
7				27				47			
8				28				48			
9				29				49			
10				30				50			
11				31				51			
12				32				52			
13				33				53			
14				34				54			
15				35				55			
16				36				56			
17				37				57			
18				38				58			
19				39				59			
20				40				60			

**REQUIRED INFORMATION!**

DISTANCE POINT A TO POINT B \_\_\_\_\_

**POINT TO POINT CROSS DIMENSIONS**

PT. \_\_\_\_ to PT. \_\_\_\_ Distance = \_\_\_\_\_

PT. \_\_\_\_ to PT. \_\_\_\_ Distance = \_\_\_\_\_

PT. \_\_\_\_ to PT. \_\_\_\_ Distance = \_\_\_\_\_

PT. \_\_\_\_ to PT. \_\_\_\_ Distance = \_\_\_\_\_

---

**RAISED AREAS**

Begins @ PT. # \_\_\_\_\_ Ends @ PT. # \_\_\_\_\_

Begins @ PT. # \_\_\_\_\_ Ends @ PT. # \_\_\_\_\_

---

**POOL TYPE**

Gunit  Package  On-Ground

Indicate Package or On-Ground Manufacturer

---

**COPING INFORMATION**

Aluminum Receptor Coping Width \_\_\_\_\_

Other/Specify \_\_\_\_\_

Is Coping Rough?  YES  NO

Price W/Under Cover Padding?  YES  NO

---

**DECKING INFORMATION**

3'  3' Or More  4' Or More

Less Than 3'- How Much Deck Is Available? \_\_\_\_\_

Deck Type \_\_\_\_\_

---

Loop Loc Pipes Wanted For Entire Cover?  YES  NO


What Is Corner Radius? \_\_\_\_\_

Do You Want Cut Corners?  YES  NO

PROVIDE INSIDE POOL DIMENSIONS ONLY • SHOW LOCATION OF POINTS "A" & "B" IN RELATION TO POOL • SHOW ALL OBSTRUCTIONS & PLANTERS  
 • SHOW AREAS WHERE DECK IS LESS THAN 3' FROM WATERLINE TO OUTSIDE OF DECK INCLUDING COPING

\*\* DISTANCE FROM POINT "A" TO POINT "B" = \_\_\_\_\_ \*\*

"A-B" Measurements cannot be used unless this distance is given!

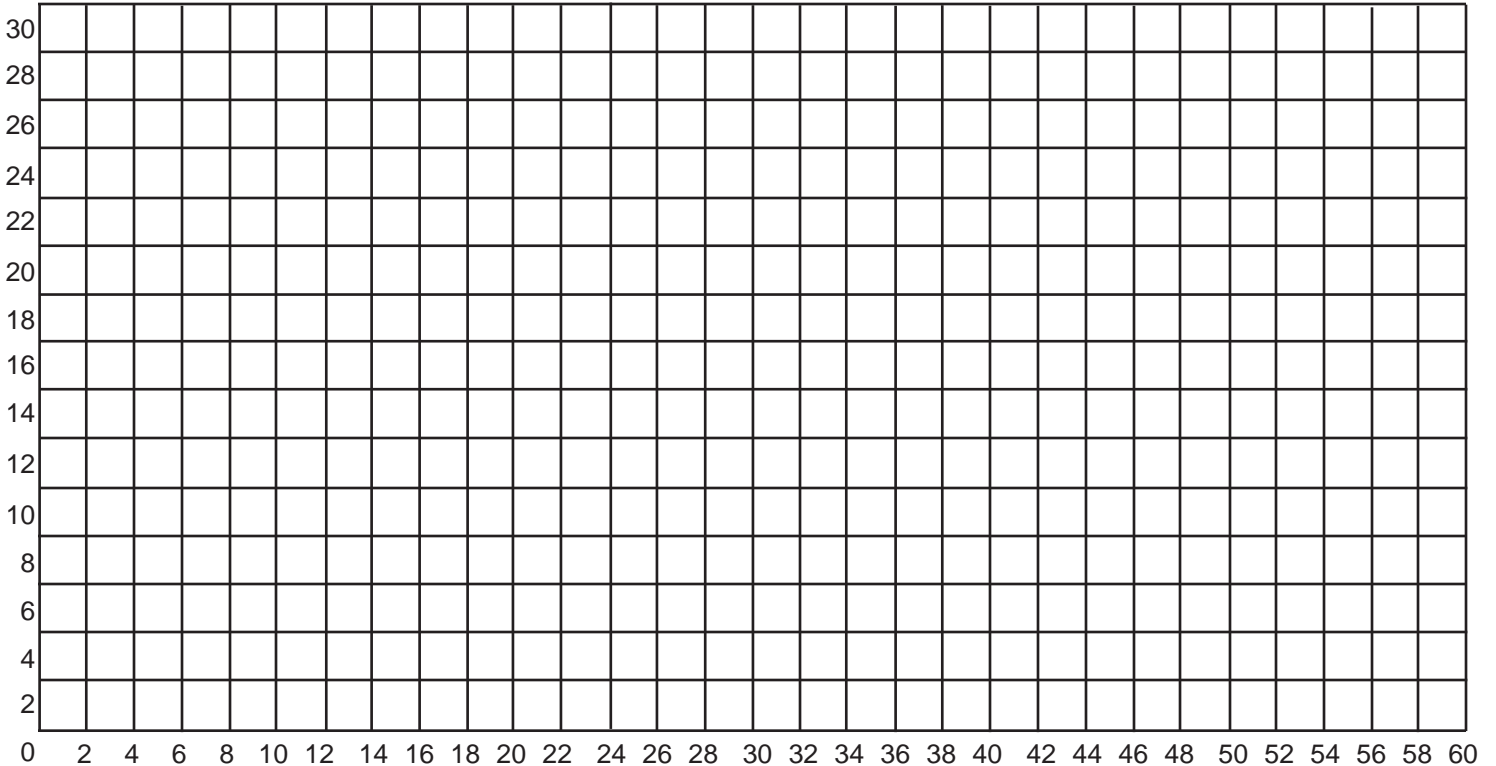



# MEASURING INSTRUCTIONS

1. Begin with a freehand sketch indicating inside pool dimensions. Include deck area, planters and any obstructions within 3' of the waterline. **A photo of the pool is needed when rocks, waterfalls, raised walls, spas or anything out of the ordinary exists.**
  2. Establish two points, "A-B" with "A" on the left as shown. "A-B" line must be at least 3' away from the pool and 2/3 the length of the pool; 20'-25' is typical (show this on the sketch). To mark "A-B" points on deck - use chalk marks, on ground - use stakes in the dirt.
- NOTE:** The "A-B" line **must never** cross the pool line and should be approximately 3' away from the pool at the closest point (4' to 5' away for pools over 44' long).
3. Using chalk, mark and number points along the inside edge of the pool at approximately 3' intervals. Number all corner points, ladders, handrails, grabrails, slide legs, rocks, spillways, spa walls separating spa and pool, fill spout and dive stand. **1' to 2' intervals should be used in small or tight radius areas and raised wall areas.** At least 3 points along straight walls.
  4. Measurements are now taken from point "A" to point #1, then point #2, and all the way around the pool. Then measure from point "B" to same point #1 and then #2, as you did for point "A". Measurements are listed in column format as shown.
  5. Take measurements **between 2 known points** to determine the **length and width** of the pool. Additional measurements for difficult pools are suggested. Cross dimensions to any raised beam obstacles are also recommended.

NO.	A	B
1	12'-3"	28'-5"
2	13'-8"	29'-7"
3	14'-0"	32'-6"
4		
5		
6		
7		
8		
9		
10	CONTINUE	CONTINUE
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		

